

Standard Features

- Low pressure piston drive with filter.
- Minimum pressure requirement of 30 psi.
- Automatic drive shut-off at end of irrigation cycle.
- Automatic water shut-off.
- Adjustable width wheeled sprinkler cart.
- Part circle sprinkler
- Pressure gauge.
- Speed control valve for more accurate applications.
- Scroll type hoseguide.
- Heavy duty rubber supply hose.
- Automatic cart loading.
- Automatic cart lifting.


P.E. Pipe O.D.: 1.26" (32 mm)			P.E. Pipe I.D.: 1.00" (25.4 mm)				P.E. Pipe Length: 295' (90 m)						
32/295							SPEED OF P.E. PIPE PULL IN METERS/HOUR						
							10	15	20	25	30	40	
SPRINKLER: Sime Funny							SPEED OF P.E. PIPE PULL IN FEET/HOUR						
							33	49	66	82	99	131	
INLET PRESSURE (PSI)	NOZZLE PRESSURE (PSI)	NOZZLE SIZE (MM)	WATER FLOW (GPM)	SPRAY RANGE (FEET)	SPACING (FEET) 85%	ACRES PER PULL	PRECIPITATION RATE IN INCHES						
30	22	6 (0.24)	7	42	60	0.4	0.3	0.2	0.1	0.1	0.1	0.1	0.1
40	29		8	48	60	0.5	0.3	0.2	0.2	0.1	0.1	0.1	0.1
76	58		12	57	90	0.7	0.4	0.2	0.2	0.1	0.1	0.1	0.1
35	22	7 (0.28)	10	46	60	0.5	0.4	0.2	0.2	0.2	0.1	0.1	0.1
45	29		11	50	60	0.5	0.4	0.3	0.2	0.2	0.1	0.1	
89	58		16	61	90	0.7	0.4	0.3	0.2	0.2	0.2	0.1	0.1
ESTIMATED TIME FOR COMPLETE WINDING IN HOURS → → →													

Performance data has been obtained under ideal test conditions and may be adversely affected by wind, poor inlet pressure conditions or other factors.

No representation regarding droplet condition, uniformity, application rate or suitability for a particular application is made herein.

Operating at lower or higher pressures than stated above may result in warranty being voided.

Acreage is based on 1-inch application, 15 hours a day, 7 days a week.

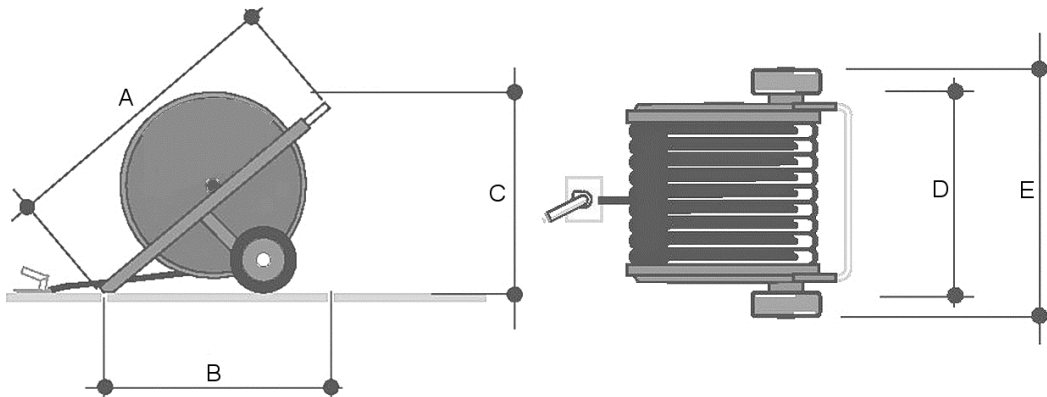

Dimensions

A	n/a
B	3'-3"
C	2'-8"
D	2'-3"
E	2'-7"

Empty Weight

190 lbs